




Pants KIM is slim cut and slightly flared. It is a great basic pattern, which, depending on your choice of material, will have a different effect every time it is sewn. The front pant cuffs include elastic gathers; the back half of the pant cuffs include ruffles.

The pants KIM may be sewn with or without the cuffs, ruffles and/or pockets. KIM, in its simplest form, is a good choice for beginners.

You may view design examples here:  
<http://www.farbenmix.de>.



## Sizes (EUR - USA)

- ✿ 86/92 - 1/2
- ✿ 98/104 - 3/4
- ✿ 110/116 - 5/6
- ✿ 122/128 - 7/8
- ✿ 134/140 - 9/10

## 1-11<sup>en</sup> Pants with Gathers KIM

Important: Please take measurements, especially the waist and the desired length.

Sizes	EUR US	86/92 1/2	98/104 3/4	110/116 5/6	122/128 7/8	134/140 9/10
Waist (actual)		42 cm 16 1/2"	44 cm 17 3/8"	46 cm 18 1/8"	49 cm 19 1/4"	52 cm 20 1/2"
Side seam (out seam)		46 cm 18 1/8"	54 cm 21 1/4"	63 cm 24 3/4"	70 cm 27 1/2"	78 cm 30 3/4"
<b>Fabric (54")</b>		<b>60 cm 24"</b>	<b>70 cm 28"</b>	<b>80 cm 31 1/2"</b>	<b>90 cm 36"</b>	<b>100 cm 39 1/2"</b>
Notions	1 yard. Elastic (1/2 in.), 1 button, thread					


### Cutting the Layout

Fold fabrics in half lengthwise so that one selvage lies on the other and the right side is facing in. Pin pattern pieces to left side of the fabrics as shown in the cutting layout and include a 3/8" seam allowance. The pieces are cut with the grain. **Please note that the pattern pieces do not include a seam allowance.**

### Pattern pieces

- 1 - Pant leg front top 2 x
- 2 - Pant cuff front 2 x
- 3 - Front pocket (side) 2 x
- 4 - Front pocket 2 x
- 5 - Pant leg back top 2 x
- 5a - Saddle 2 x
- 6 - Back cuff upper 2 x
- 7 - Back cuff lower 2 x
- 8 - Back pocket 2 x
- 9 - Waistband - (finished width 3.5 cm, 1 3/8") 1 x
  - Sz. 86/92: 9 x 56 cm, 1/2: 3 1/2" x 22"
  - Sz. 98/104: 9 x 58 cm, 3/4: 3 1/2" x 22 7/8"
  - Sz. 110/116: 9 x 59 cm, 5/6: 3 1/2" x 23 1/4"
  - Sz. 122/128: 9 x 63 cm, 7/8: 3 1/2" x 24 3/4"
  - Sz. 134/140: 9 x 66 cm, 9/10: 3 1/2" x 26"
- 10 - Bias tape 2 x
  - Sz. 86/92: 4 x 42 cm, 1/2: 1 1/2" x 16 1/2"
  - Sz. 98/104: 4 x 46 cm, 3/4: 1 1/2" x 18 1/8"
  - Sz. 110/116: 4 x 48 cm, 5/6: 1 1/2" x 18 7/8"
  - Sz. 122/128: 4 x 50 cm, 7/8: 1 1/2" x 19 5/8"
  - Sz. 134/140: 4 x 52 cm, 9/10: 1 1/2" x 20 1/2"

### Cutting layout

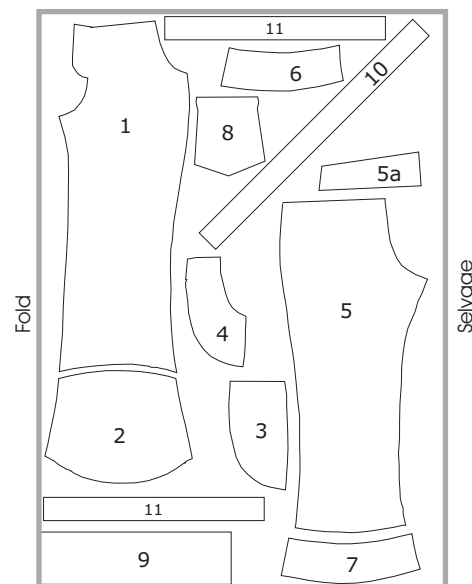

- 11 – Ruffles for the back cuffs 2 x each
- |   |   |
|---|---|
| Sz. 86/92: 4 x 32 cm (upper) – 34 cm (lower),   | 1/2: 1 1/2" x 12 5/8" (upper) – 13 3/8" (lower) |
| Sz. 98/104: 4 x 33 cm (upper) – 35 cm (lower),  | 3/4: 1 1/2" x 13" (upper) – 13 3/4" (lower)     |
| Sz. 110/116: 4 x 34 cm (upper) – 36 cm (lower), | 5/6: 1 1/2" x 13 3/8" (upper) – 14 1/4" (lower) |
| Sz. 122/128: 4 x 35 cm (upper) – 37 cm (lower), | 7/8: 1 1/2" x 13 3/4" (upper) – 14 1/2" (lower) |
| Sz. 134/140: 4 x 36 cm (upper) – 38 cm (lower), | 9/10: 1 1/2" x 14 1/4" (upper) – 15" (lower)    |

## **Sewing**

1. Cut the pieces according to the piece list.
2. Pin the pocket front pieces to the front pant leg (1), right sides together, and stitch the pocket. Trim the seam allowance. Turn and press the pocket. Topstitch. Pin pocket back pieces to pocket front pieces and stitch along the pocket bottom.
3. Baste pockets to seam allowance of the side seam.
4. Stitch using zigzag the elastic pieces to the bottom front cuffs (2) as indicated on the pattern, stretching the elastic as you stitch. Secure the ends of the elastic.
5. Stitch front pant cuff (2) to front pant leg (1) right sides together. Press seam and topstitch.
6. Stitch saddle (5a) to back pant leg (5) right sides together. Please observe notches. Press seams and topstitch.
7. Press under seam allowance of back pocket sides and bottom (8) and stitch 3/8" from edge. Fold over the top edge of the back pockets twice, press and topstitch. Stitch back pockets to back pant legs (5) as indicated on the pattern sheet and secure the pocket corners with small zigzag stitches.
8. If ruffles are wanted on the back pant cuff, stitch ruffles to 6 & 7, right sides together. Press and topstitch ruffles. Stitch back pant cuffs to back pant leg right sides together. Press and topstitch seam.
9. Stitch side seam of back and front pant leg, right sides together. Press seam and topstitch.
10. The pant cuff edge can be finished either with bias tape or a ruffle. Stitch bias tape with right sides together to the cuff edge. Turn and press. Topstitch.
11. Stitch the inseam. Fold in the seam allowance on the cuff edge and finish with a small stitched triangle.
12. Insert one pant leg, right side out, into the other pant leg right side in. Pin the rise and stitch the crotch seam. Press seam and topstitch.
13. Attach zipper, if desired. An elastic waistband will work for a child of average or thin build.
14. Attach waistband. The waistband (9) should extend past each side of the fly. Press the waistband up. Fold at the crease and press waistband. Add a small piece of fusible interfacing to the buttonhole area and the button back. Stitch buttonhole. Stitch ends of waistband, notch corners and turn. Turn the seam allowance into the waistband and pin. Stitch, but leave a small opening for the elastic. Stitch the elastic casing in the middle of the waistband. Insert elastic and secure. Close opening. Attach button.

We wish you much fun and success with your sewing project!

Design: © *Farbenmix.de* Sabine Pollehn  
 Patterndirektice: Anja Müssig, Translation: Nancy Langdon, Cover Art: Gaby Siewertsen,  
 Instructions: Katalina Grohman

*Single sewn examples of this design may be sold individually by seamstresses commercially. However, this design may not be reproduced in larger quantities without express written consent. The pattern may not be photocopied or reproduced digitally or otherwise. The design is protected under copyright law, all rights reserved.*